

Sikaflex®-118 Extreme Grab

HIGH GRAB ADHESIVE

ADVANTAGES



Very high initial grab allows bonding heavy objects without temporary fixation



Bonding of many construction materials including mirrors



A strong and elastic bond provides ideal **stress transfer and distribution**



Very low emissions make the adhesive suitable for indoor usage

KNOW-HOW

FROM SITE TO SHELF



Sikaflex®-118 Extreme Grab

High Grab Adhesive – bonding heavy objects without temporary fixation



Our most current General Sales Conditions shall apply.
Please consult the most current local Product Data Sheet prior to any use.

Sika Services AG

Sealing & Bonding

CH-8048 Zurich

Switzerland

Phone +41 58 436 40 40

www.sika.com

© SIKASERVICES AG / SEALING & BONDING

BUILDING TRUST



Sikaflex®-118 Extreme Grab

HIGH GRAB ADHESIVE

USES



Indoor and outdoor use

Bonding and sealing of stones, bricks, window and door sills, mirrors, wood beams and heavy landscaping coverings

Good adhesion on concrete, mortar, natural stones, clinker, fiber cement, ceramic, wood and metals and glass



Adhesive-sealant with CE marking, EN 15651-1 F EXT-INT CC 20HM




EXPERIENCE THE STRENGTH OF Sikaflex®-118 Extreme Grab!

THE INSTANT RESULT DIRECTLY AFTER APPLICATION IS CONVINCING.

STEP BY STEP VIEW OF GETTING THE STRONG BOND WITHOUT EXTRA TEMPORARY FIXATION




Mount the V-cut nozzle and insert the cartridge into the gun.

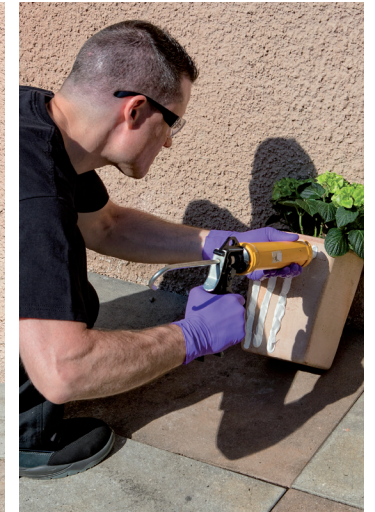

Apply the adhesive on a clean substrate in vertical beads or dots.



Make sure you apply enough adhesive depending on conditions of the substrate.

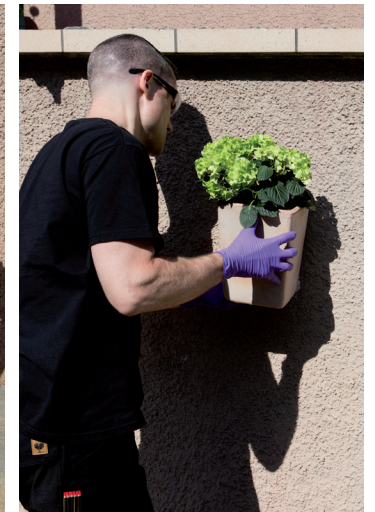

Use sufficient hand pressure to ensure good wetting on rough substrates.